



ART. 4425

Cable reels

Cable reel, s.280, supply voltage 400 V three phase.
Number of conductors 4, cable type 4G x 2,5 - H05
VV-F, cable length 8 + 1 (m).



FLUIDS

ELECTRICITY

SECTORS

AERONAUTIC | AGRICULTURE | AUTOMOTIVE | LUBE TRUCK AND INDUSTRIAL VEHICLE | CLEANING | BUILDING
INDUSTRY AND ROAD CONSTRUCTION | RAILWAY TRANSPORT | CHEMICAL INDUSTRY | MANUFACTURING INDUSTRY
| MINING | SHIPPING AND OFFSHORE
ELECTRICITY

Features	UM	Value
Information		400 V three phase
Protection degree of electrical part		IP44
Environment temperature	°C	-5 ÷ +40
Number of conductors		4
Cable type		4Gx2,5 - H05 VV-F
Cable length	m	8 + 1
Cable inlet	m	1,2
Max power use (20 °C) wound	kW	2
Max power use (20 °C) unwound	kW	6
Thermal protector		yes
Rewinding clutch		-
Socket		-
Plug		-
Packing	N° - m³	1 - 0,043
Gross weight	kg	6,4 ÷ 8,2

RAASM SpA


via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2019 All rights reserved to RAASM S.p.A.



Overall dimensions

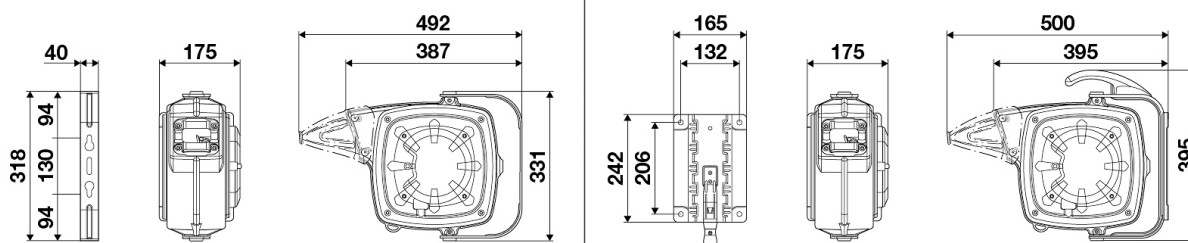

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2019 All rights reserved to RAASM S.p.A.