

# H.C.B-A1448

## SAF BUSH REMOVAL/INSTALLATION TOOL KIT



OEM No.: 3 434 3326 00

1. Place wheel chocks in front of and behind the trailer wheels to prevent the trailer from rolling.

**WARNING Risk of rolling** Failure to use wheel chocks might allow the vehicle to roll which could result in death or serious injury. Secure the vehicle by wheel chocks from rolling away.

2. Bleed all air from the air suspension system.

3. Place jacks under the trailing arm.

4. Remove the adjustable pivot bolt.

5. Remove the shock absorber from the trailing arm.

### Risk of tool damage!

If you used an impact wrench to turn the threaded rod of the pivot bushing replacement tool, the threaded rod could be damaged due to the poor force control of the impact wrench – especially in the event of the pivot bushing being stuck.


DO NOT use an impact wrench to turn the pivot bushing replacement tool. XXInstead, use a box wrench or a socket wrench (width across flats: 46 mm).If you used an impact wrench to turn the threaded rod of the pivot bushing replacement tool, the threaded rod could be damaged due to the poor force control of the impact wrench – especially in the event of the pivot bushing being stuck.

DO NOT use an impact wrench to turn the pivot bushing replacement tool.

### Removal



### Installation

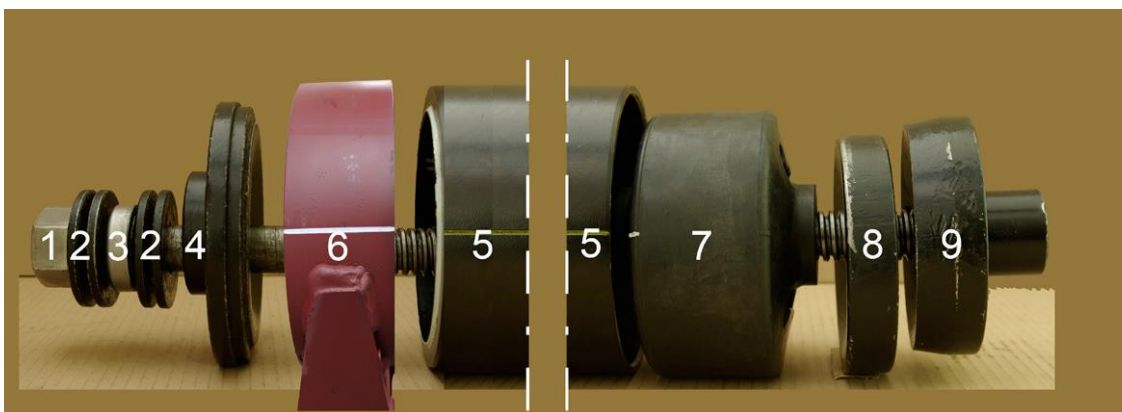

The centering ring of the receiver tube is used to center the receiver tube on the trailing arm receptacle. When the installation tool is used, the centering ring must always be positioned against the trailing arm receptacle.