



Ice Cube

# CB 955 HC

B-Qube



## Self-contained ice maker - Sprayer system Daily production up to 97 kg

Hotel	●	●	●	●	●	●	●	●	●
Restaurant	●	●	●	●	●	●	●	●	●
Fast food	●	●	●	●	●	●	●	●	●
Bar	●	●	●	●	●	●	●	●	●
Disco	●	●	●	●	●	●	●	●	●
Fish markets	●	●	●	●	●	●	●	●	●
Supermarkets	●	●	●	●	●	●	●	●	●
Medical & SPA	●	●	●	●	●	●	●	●	●
Industry	●	●	●	●	●	●	●	●	●

Hotel	●	●	●	●	●	●	●	●	●
Restaurant	●	●	●	●	●	●	●	●	●
Fast food	●	●	●	●	●	●	●	●	●
Bar	●	●	●	●	●	●	●	●	●
Disco	●	●	●	●	●	●	●	●	●
Fish markets	●	●	●	●	●	●	●	●	●
Supermarkets	●	●	●	●	●	●	●	●	●
Medical & SPA	●	●	●	●	●	●	●	●	●
Industry	●	●	●	●	●	●	●	●	●



Available Drain Pump (DP) version




Available Drain Pump (DP) version

### ► Features & Plus

- Compact and crystal cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Air or water cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- Adjustable Stainless Steel feet

- ON-OFF rocker switch
- Standard and special voltages
- HFC Free
- Automatic Washing system



Green-Tech Design




Side openings for better ventilation



Double water inlet (W models only)



Plug-in electrical connection



Drain Pump (DP)

## 2 Years Warranty subject to limitations

### ► Certifications available for this model



[www.bremaice.it](http://www.bremaice.it)  
[info@bremaicegroup.it](mailto:info@bremaicegroup.it)


We are Brema Group






## Self-contained ice maker - Sprayer system

### Daily production up to 97 kg

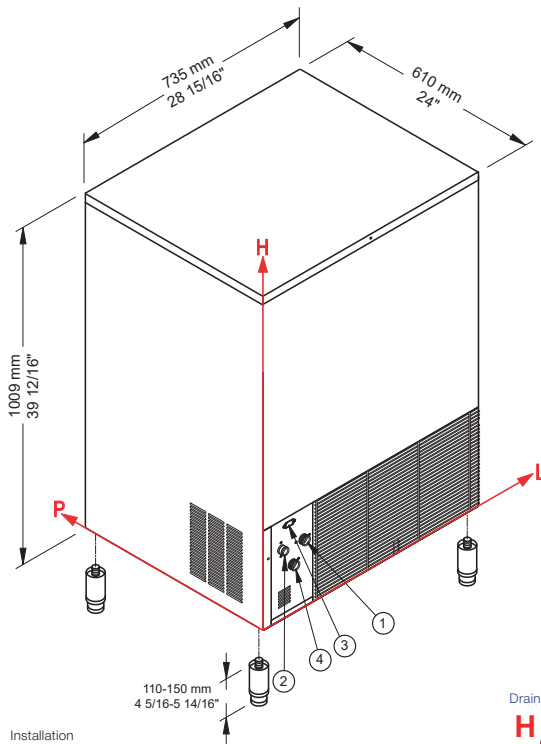

Installation




### ► Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

### ► Available ice cube size

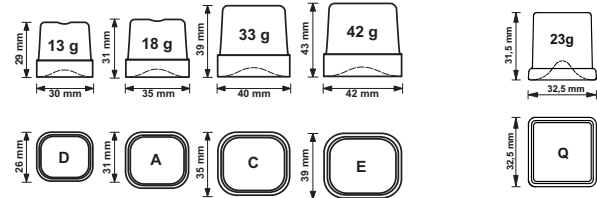

### ► Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	97 kg					
	50° F		214 lbs				
	21° C			95 kg			
	70° F				209 lbs		
	32° C					82 kg	
	90° F						181 lbs

### ► Connections standard version

- ① Water in.: 135 mm / 5 5/16" - 237 mm / 9 5/16" - 3/4"
- ② Water out.: 62 mm / 2 7/16" - 242 mm / 9 8/16" - 24 mm / 15/16"
- ③ Electrical connections: 100 mm / 3 15/16" - 312 mm / 12 5/16"
- ④\* Cond water in.: 98 mm / 3 14/16" - 177 mm / 6 15/16" - 3/4"

\* Only for water cooling systems

### Connections DP version

- 1 Water in.: 135 mm / 5 5/16" - 192 mm / 7 9/16" - 3/4"
- 2 Water out.: 72 mm / 2 13/16" - 53 mm / 2 1/16" - 24 mm / 15/16"
- 3 Electrical connection: 100 mm / 3 15/16" - 312 mm / 12 5/16"

All measures are referred to the rear bottom-left corner (L-H-Ø)

### ► Technical information

Production in 24h	95 kg / 209 lbs
Store capacity, up to	55 kg / 121 lbs
Cooling system	A - W
Kind of cube	A-18g, C-33g, D-13g, E-42g, Q-23g
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	870 W
Fuse	10 A
Electrical consumption	23 kWh/100kg

All the technical information must be considered at the following conditions:

- Sizes without feet
- Standard Cube (18 g)
- Ambient temperature +21° C
- Water temperature +15° C
- Electrical consumption at +32° C (standard voltage)
- Average power consumption at +43° C (standard voltage)

**Models and specifications are subject to change without notice**

Water consumption	A: 2,3 l/kg - 27,6 gal/100 lbs
	W: 16,5 l/kg - 197,7 gal/100 lbs
Sizes (L-P-H mm)	735 - 610 - 1009
(L-P-H in)	28 15/16 - 24 - 39 12/16
Sizes with pack (L-P-H mm)	780 - 640 - 1185
(L-P-H in)	30 11/16 - 25 3/16 - 46 10/16
Net weight	74 kg / 163 lbs
Gross weight	86 kg / 190 lbs
Finish	Stainless steel, 18/8, scotch brite

Rev. 00 - Issued February 2026

